

## B/T Wireless Music Transceiver

---

### Feature:

- B/T Wireless devices searching automatically to realize connect, transmit wireless audio transmission
- No APP and driver need.
- Noise reduction and echo cancellation
- Multi-band equalizer configuration
- Support voice prompts
- Integrated Li-Type battery charger and support 300 mA fast charge and over-discharge protection
- Built-AEC echo cancellation and noise cancellation circuit ANC
- Built-in enhanced signal transmission circuit, connected faster and more stable
- Automatic memory connected function , the operation is easier, more convenient

### Specification:

B/T Version	B/T 4.2、Consume low power (A2DP)
Supported protocol	A2DP, AVRCP, HFP, SPP HID
Current Consumption	≤ 43MA (Receiving Mode)
	≤ 60MA (Transmitting Mode)
	< 18MA (Standby Mode)
Built-in battery	Polymer 400MAH
Charging current and time	2 Hours, 300MA
Playing Period	8Hours
B/T distance	10M
Interface	Micro USB (For Charging)
	3.5MM stereo jack (For Transmitting and Receiving)
Compatibility	All B/T audio devices. (smartphone/ PC/ Notebook/ B/T Wireless phone., etc)

LED Definition		
Status of Device	LED Status	
In charging	Red LED turns on	
Finish charging	Red LED turns off	
Power On	Blue LED flashes faster	
Power Off	LED Off	
Receiving	Receive mode	Receive Indicator LED(Red) Lighting
	Low power	Receive Indicator LED(Red) flashes Slowly
	Waiting Connection	Status LED(Blue) flashes faster
	connected	Status LED(Blue) flashes slowly
Transmitting	Transmitting mode	Transmit Indicator LED(Red) Lighting
	Low Power	Transmit Indicator LED(Red) flashes Slowly
	Searching BT device	Status LED(Blue) flashes faster
	Connected	Status LED(Blue) flashes slowly

### Charging the battery:

Please charge the device at the first time.

1. Insert micro USB plug into the device, and another side to the power adapter.
2. During the charge, the RED light turns on
3. When charging complete (around 2 hours), the RED light turns off.

### Connects t “AUDIO IN” to your audio amplifier (Receiving Mode):

1. Taking the dual 3.5mm plug cable, plug one side into the “RECEIVE” jack on this device, and the other side, plug into the audio power amplifier.
2. Power on the device by pressing the button for 5 second.
3. Blue indicator light s blink rapidly.
4. After connected, the B/T status indicator light (BLUE) flash slowly.
5. This device shutdown automatically after 10 minutes when no B/T transmitter pair with it.


### Connects to “AUDIO OUT” on your TV (Transmitting Mode):

1. Taking the dual 3.5mm plug cable, plug one side into the “TRANSMIT” jack on this device, and the other side, plug into the “AUDIO OUT” to your device (ex: TV, DVD player, audio output...)
2. Power on the device by pressing the button for 5 second.
3. Blue indicator light s blink rapidly.
4. After connected, the B/T status indicator light (BLUE) flash slowly.
5. If it is not the B/T device you want to pair with, you can press the multifunction key to switch to the next B/T device.
6. This device shutdown automatically after 10 minutes when no B/T transmitter pair with it.

# Setup Diagram 1



# Setup Diagram 2

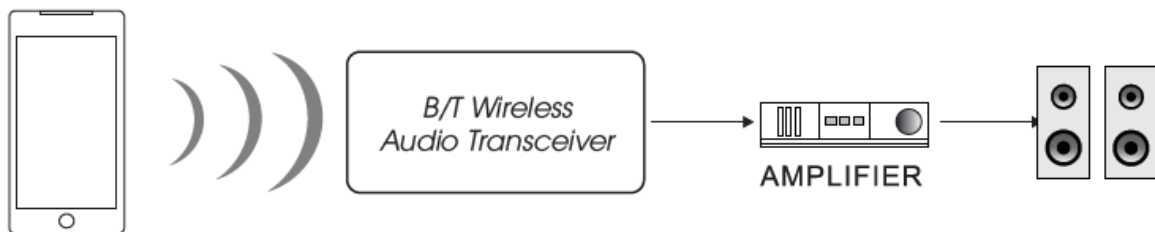

# Setup Diagram 3

