

1


Pair with the CLB speaker via your phones Bluetooth settings. Out of the box, there is no default password.

2



Download the FeasyBlue App from Google Play or the Apple App store.

Please Note: App styling and features may vary depending on the device platform you are using.

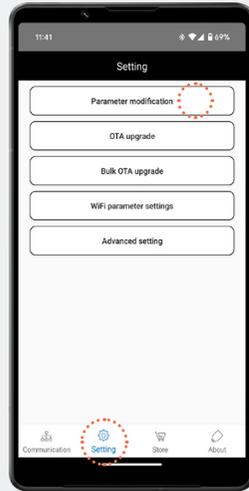

3

Open the FeasyBlue app, click the Gear icon at the bottom of the screen to enter settings and then select Parameter Modification.





Enter the modification password **20138888**.

4

On the Parameter Modification page enter your desired name in the Device name field.


Choose a Pin if desired, for example 1234. Please Note: This will add a Bluetooth pairing code.

Under the Custom Command section, enter the following details: **AT+ SSP =:0**

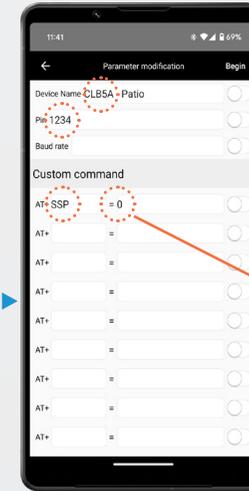

5

After editing the desired fields make sure the toggle switches on the right of each field are set to on (Green) and select Begin.

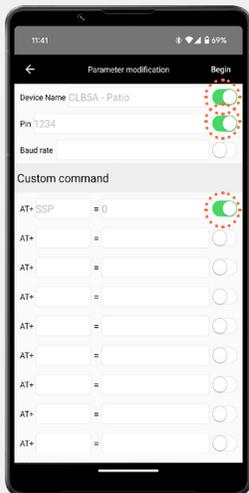

6

Choose the paired CLB device from the list on the screen.


The app will send the new device parameters to the CLB speaker. To ensure that the change has been successful look for "Success" after each edited field as shown in the screen on the right.



7

After the parameters have successfully been updated, forget the previously paired CLB device in your phone's Bluetooth settings. Turn the CLB unit off for a few seconds and then on again via the power switch on the rear.


Once the unit is powered back up, initiate the pairing process again. You will now see the new name and be able to pair with the speakers using your chosen Name and Pin.

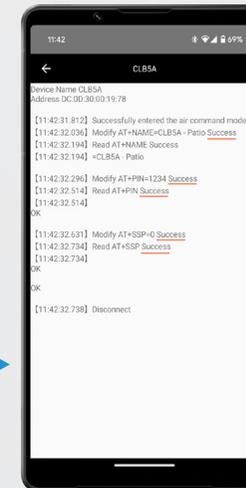

If you have forgotten the password and need to restore your CLB speakers please follow these instructions.

1 

Download the FeasyBlue App from Google Play or the Apple App store.
Please Note: App styling and features may vary depending on the device platform you are using.

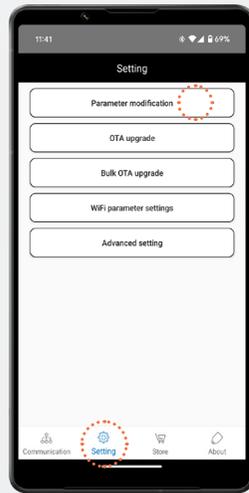

2

Open the FeasyBlue app, click the Gear icon at the bottom of the screen to enter settings and then select Parameter Modification.




Enter the modification password **20138888**.


3

On the Parameter Modification page enter the below details under the the Custom Command section:

AT+: RESTORE




The device name and pin can be left unedited as the fields are not required.

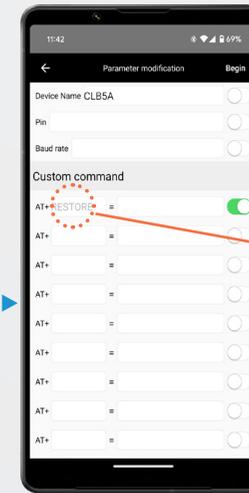

4


After editing the required field make sure the toggle switch on the right of the field is set to on (Green) and select Begin.

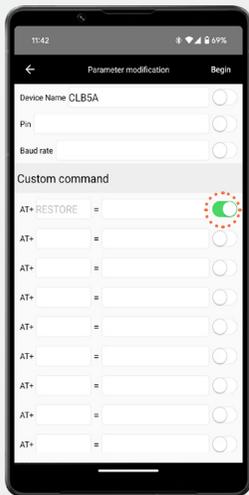

5

At the top right of the page select the BLE checkbox, then search the list for a device labeled CLB5A-LE or CLB6A-LE and select it. For the purposes of resetting the unit, be sure to only select a “-LE” version from the list, otherwise the reset will not work.

The app will then send the restore command to the CLB speaker. To ensure that the change has been successful, look for “Successfully entered the air command mode” on the next screen.

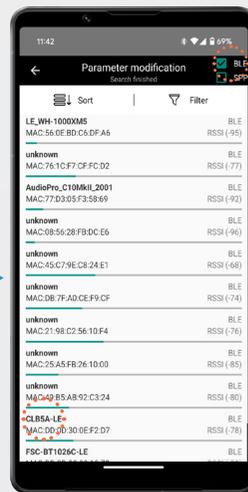

6

After the restore has been completed successfully, forget any previously paired CLB device in your phone's Bluetooth settings. Turn the CLB unit off for a few seconds and then on again via the power switch on the rear.

Once the unit is powered back up it will be listed in your phone's available Bluetooth devices with the original CLB5A/CLB6A name and no pin.

