





Ness-Bridge

Ness Mezzo

Ethernet Interface Module

Free app for Android and iOS

Ness-Bridge is an easy to install ethernet interface providing internet connectivity for Ness D8/D16 control panels.

Ness-Bridge in combination with the free **Ness Mezzo** app provides handy remote operation features for your Ness control panels.


- Arm and Disarm
- Home Mode operation
- Operate D8/D16 outputs1
- Receive Push Notifications for Arm/Disarm and alarm events
- View zones and panel status

SIMPLE HARDWARE INSTALLATION

POWERFUL FREE APP EASY ADD-ON FOR NESS D8/D16 PANELS²


OPERATE YOUR PANEL REMOTELY



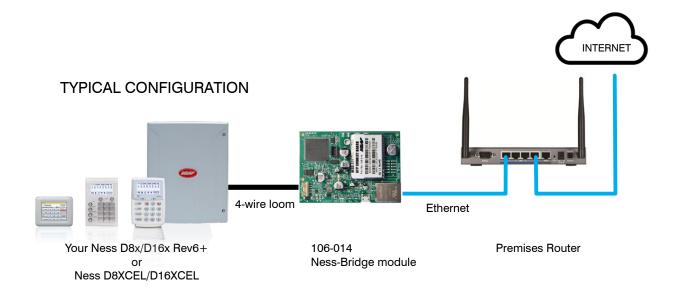

Ness-Bridge is an easy installation in Ness D8/D16 housings.

Includes red slider mounting rails & 4-wire loom.

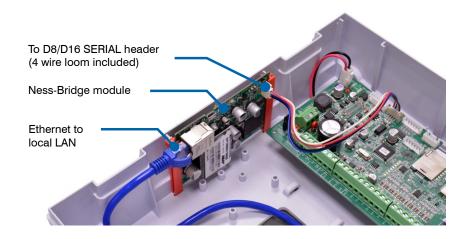

Specifications

NESS-BRIDGE PCB DIMENSIONS	92 x 65 x 18mm
INTERFACE	RJ45 Ethernet to local LAN / 4-wire loom to control panel
POWER REQUIREMENT	13.8V DC via 4-wire loom to D8/D16
AVERAGE CURRENT DRAW	120mA
COMPATIBILITY	Ness D8XD / D16XD (Rev6 and later), D8XCEL 4G / D16XCEL 4G

¹ Outputs require optional 106-013 Relay Board/s.

Ordering Information

106-014 Ness-Bridge Ethernet interface







Innovative Electronic Solutions www.ness.com.au







 $^{^{\}rm 2}$ Operation of outputs via Mezzo app is not supported in D8/D16 V6.x to V7.x