




MQS-37 MINI-MIX LINE MIXER

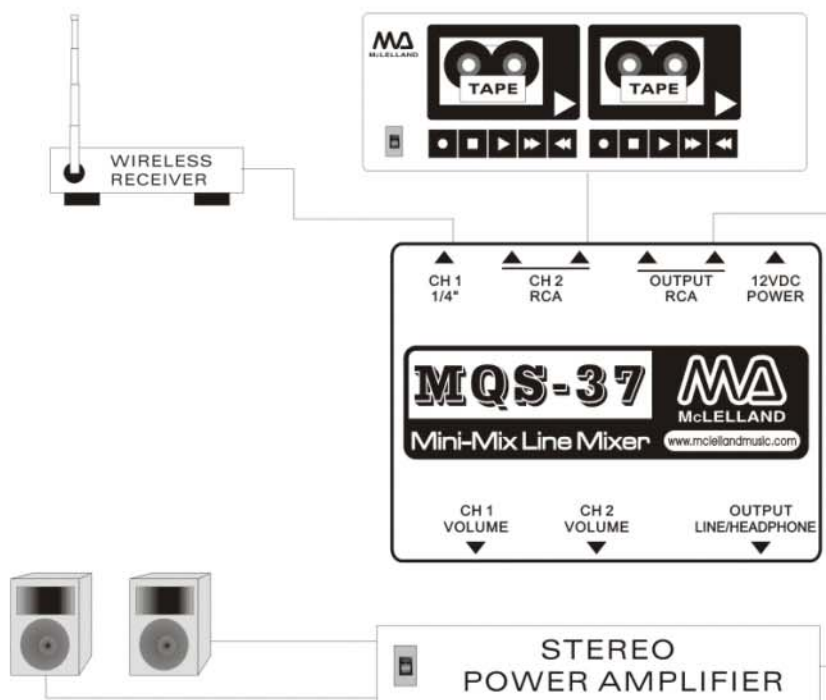

INTRODUCTION

Thank you for your choice of the MQS-37 MINI-MIX Line Mixer. The MQS-37 is a two-channel mixer for mixing a 1/4" line signal such as a wireless microphone, and a stereo RCA signal such as a CD player. The MQS-37 has enough output to drive a power amplifier directly and is ideal for audio/video and aerobics instructor applications.

DESCRIPTION

CH 1 : 1/4" unbalanced jack for receiving line or instrument level signals.

CH 2 : Stereo RCA input for receiving line level signals. Note that the two signals are mixed together forming a mono signal.

CH 1 VOLUME : Controls the level of the signal from Channel 1.

CH 2 VOLUME : Controls the level of the signal from Channel 2.

LINE OUTPUTS : Stereo RCA and 1/4" jacks for connection to a line input device such as a mixer or amplifier.

POWER INPUT : Use 12 VDC power supply.

SPECIFICATIONS

Ch1 Max Gain :	32 dB
Ch2 Max Gain :	20 dB
Ch1 Input Impedance :	10K Ohms
Ch2 Input Impedance :	20K Ohms
Output Impedance :	50 Ohms
Power :	12VDC 150mA(adaptor)
Size :	95 mm x 73mm x 40mm
Weight :	229 g

