




## DATA SHEET

### Coax Cable Connector

### BNC-203

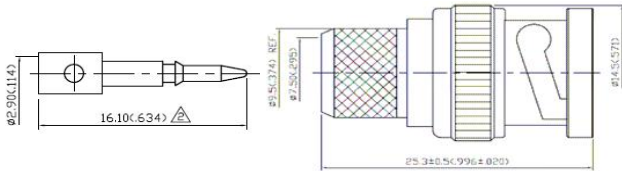

### Description

Straight Cable Plug Crimp

Suits Cables: RFI-400-UF LMR-400 CNT-400 BELDEN 9913

### Technical Data

#### Electrical

Impedance 50 Ohm  
Max Frequency 4 GHz

### Mechanical & Environmental Data

Centre contact	Solder
Outer Contact	Crimp
Mating	Two stud bayonet coupling
Durability	500 matings
Coupling nut retention	100lbs Max
Cable Retention	40 lbs min
Temperature Range	-65° to 165° C
Vibration	MIL-STD-202 Test Cond B
Salt Spray	MIL-STD-101 Test Cond B
Thermal Shock	MIL-STD-107 Test Cond B

### Material Data

Parts	Material	Plating
Connector Body	Brass	Nickel
Centre contact	Brass	Gold
Insulation	Teflon	-
Gasket	Silicone Rubber	-
Crimp Ferrule	Annealed Copper	Nickel