


This HDMIIPPRO HDMI over IP Extender uses advanced H.264 compression type which transfers signal using lower bandwidth thus transmit more smoothly. It supports 120m over single Cat5E/6 cable at point to point. A great HDMI over IP solution for meeting room, class room and home etc.

- Using H.264 compression encoding, Supports resolution up to 1080p@60Hz
- With IR remote for source selection. LED front panel showing group ID.
- Complies with TCP/IP protocol, streaming bit rate is up to 15Mbps
- Supports DHCP for easy IP address assigning and LPCM audio format
- By pass 2 way UART/RS232(Up to 115200), remote control can be used for selecting 8 group baud rate.
- Supports one to one, one to many, many to one, many to many modes.
- Can be powered by either power supply or POE
- HDCP compliant
- Supports PC tool control

<b>Performance</b>
--------------------

Protocol	H.264 encoder over TCP/IP
Video Format	480i/480p/576i/576p/720o/1080p@60Hz
Audio Format	LPCM, Audio sampling rate 48kHz
Bit Rate	15Mbps
HDCP	Yes
IR Frequency	38-56 kHz
RS232 Baud Rate	Default 2400bps-8 options
IR	supports 38kHz
<b>IP Setting&amp; Group ID Setti</b>	ing
Default IP	TX: 192.168.1.11; RX: 192.168.1.12
Group ID	Group 00-Group 63
<b>Transmitter Connections</b>	
Input	1x HDMI socket
Output	1x RJ45 output, 1x HDMI looping output
RS232	Phoenix RS232 port
<b>Receiver Connections</b>	
Input	1x RJ45 input
Output	1x HDMI socket
RS232	Phoenix RS232 port
General	
Power Supply	DC 5V 1A
Power Consumption	Max 3 watt
Dimension	TX: 119x79.5x28mm ; RX:
	119x79.5x28mm

**Order Code:** 07351065 Warranty: 12 months

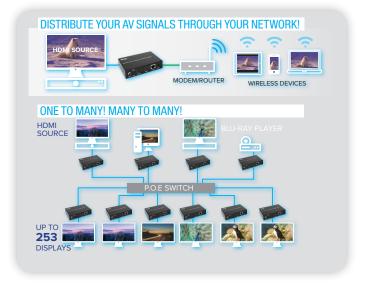

## Package contents:

- 1x Transmitter
- 1x Receiver
- 1x IR-TX cable
- 1x IR-RX cable
- 1x Manual

- 4x Mounting Screws
- 4x Detachable Mounting Ears
- 2x Phoenix Plugs For RS232 **Cable Termination**
- 2x Remote Control
- 2x 5V 1A Power Supplies

Free Fax: 1800 659 963 web: