

Instruction of LCDP25B Wall fixed installation

1.Product Features

LCDP25B Product weight:6.5kg; TV size support:32-63"; Distance to the wall: 90-545mm; Maximum load:40kg; For VESA standard:400X400 600x400mm










2.Hardware List

Important: We are not responsible for any personal injury or product damage due to mishandling, incorrect mounting, incorrect assembly or incorrect use of this product.

Note: The supplied wall mounting hardware is not for use on steel stud walls or cold cinder block walls. If you are uncertain what material your wall is constructed of or any question regarding the proper installation of this wall mount, contact a qualified contractor. If the hardware required is not including, please contact your local hardware store.

Caution: This LCD/Plasma wall mount is intended for use with television that does not exceed the maximum weight capacity designated. Using this mount with products heavier than the maximum weight indicated may result in instability causing possible injury.

Screw spare parts list

No.	Description	Specifications Model	Qty.
1		Wall plate assembly	x1
2		Plastic screw	x2
3		Arm	x2
A		M6X50mm Wallboard screw	x8
B		Φ10 Plastic screw	x8
C		M8X16mm Cross round screw	x4
D		M6X20mm Cross round screw	x4
E		Φ6 plastic spacer	x4
F		washer	x4

G



M4 Allen Key

x1

H



M6 Allen Key

x1

I




M5x8mm Cross round screw

x4


Instruction of installation operation

1

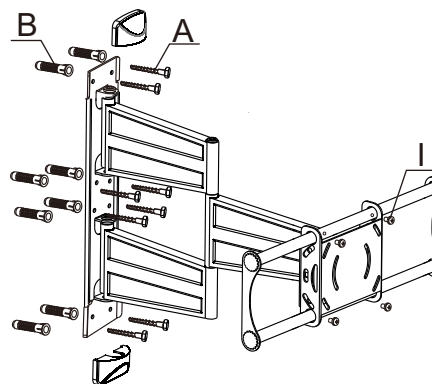


Using the bubble level to ensure the wall plate is level, Pre-drill 8 holes with a 10mm bit to 50mm deep. Insert wall anchors into the holes, then using long bolts to mount the wall to studs.

2

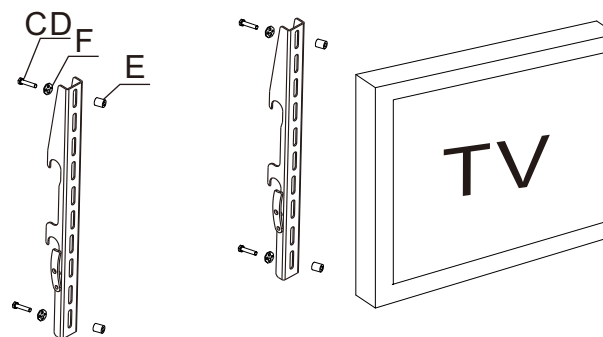

Using Long bolt (C or D), washer (F) and Spacer (E) to mount TV set to the aluminum siding.

3

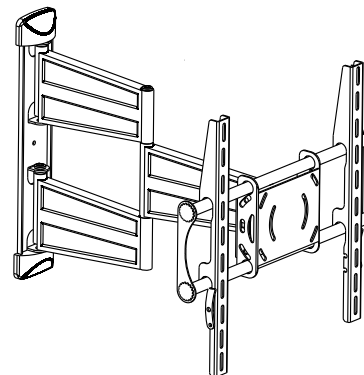

Hang the TV & anus on the mount set the bar in to the slot