



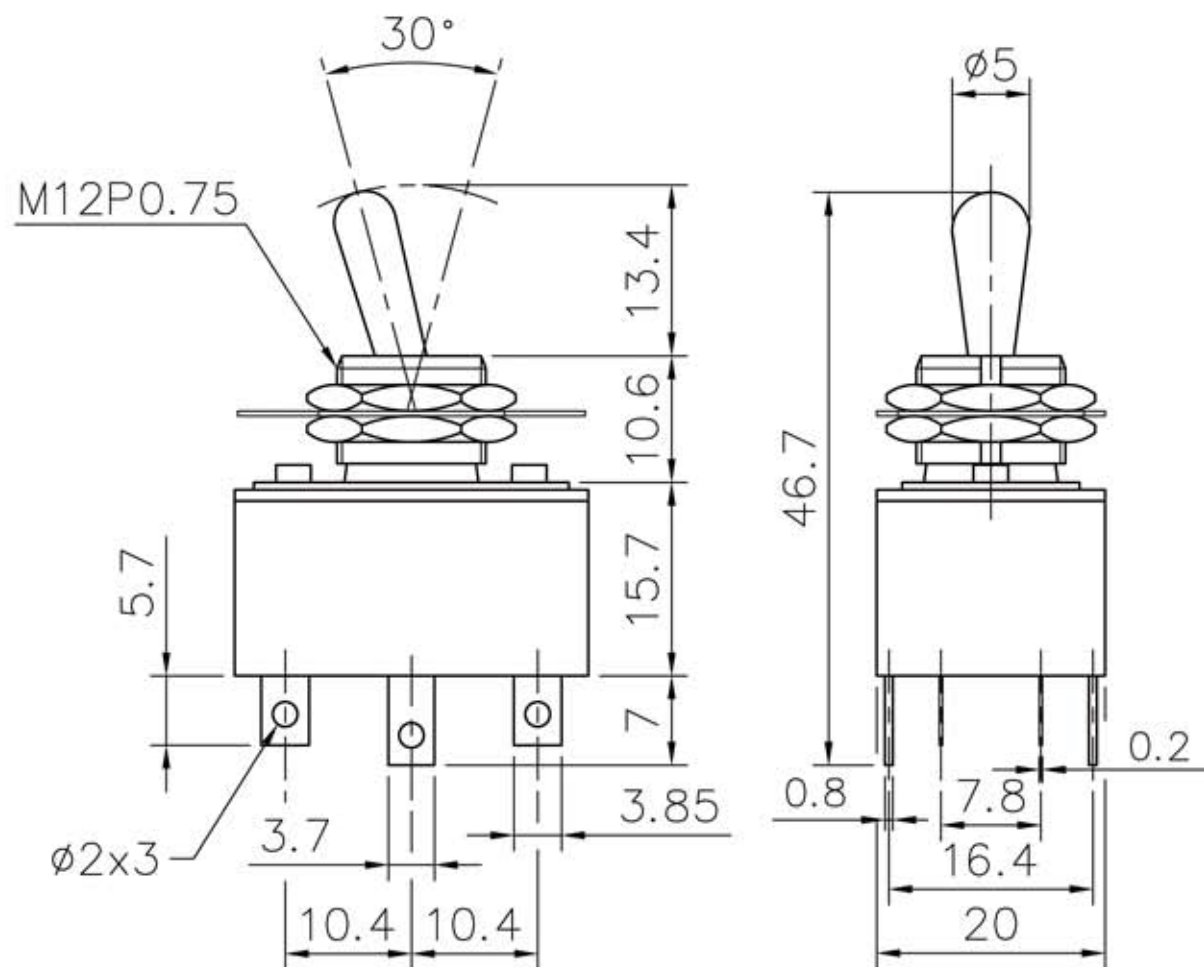

Panel Thickness :
3.0mm Max.

1. Rating: AC 125V 5A 250V 3A
6P DPDT ON-ON
2. Contact R.: 50m Ω Max.
3. Insulation R.: DC 500V 100M Ω Min.
4. Dielectric Strength: AC 1500V 1 minute.
5. Electrical Life: 20,000 mark-and-break cycles at full load.