

EDGELESS SERIES


In-Wall & Center Speakers

A seamless blend of high-end audio & interior design

Model:
EWS600

Model:
EWS800

Model:
EWS530C




INTENDED USE

- ✓ Architects Custom Projects / high-end designs
- ✓ Contractors, Custom Installers and Retailers
- ✓ Kitchens, Hall-ways, Bathrooms, Atriums
- ✓ New Construction & Retrofit Applications
- ✓ Home Theater & 2-Channel/Music Systems
- ✓ Can Be Used in Both Boats and RV's

SPECIAL FEATURES & HIGHLIGHTS

- Frameless design for reduced visibility/seamless blend with smaller footprint (over 20% less than typical frame)
- Magnetically attached versatile (round or square), paintable grilles (square grille are optional & sold separately)
- Paintable grille & frame for perfect integration
- 1" (25mm) silk dome NEO swivel-action tweeters
- Low mass stiff kevlar cone bodies for a very smooth & accurate output with attention to details
- \pm 3dB bass and treble controls (additional \pm 3dB Mid on EWS530C)
- Elaborate crossover networks with highest quality capacitors and inductors. 12dB/Octave with polyswitch protection
- Easy Turn-N-Lock™ installation mechanism for safe, time efficient and professional installation
- Gold plated, spring loaded terminals

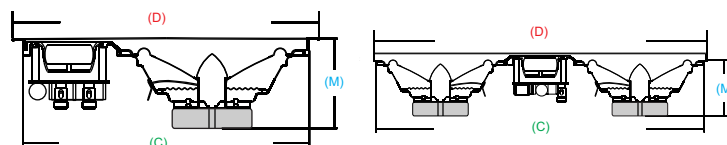

EWS-600

EWS-800

EWS-530C

(D) H x W	11 15/16" (303mm) x 8 9/16" (217mm)	13 3/4" (349mm) x 9 3/4" (248mm)	9 3/4" (248mm) x 13 3/4" (349mm)
(C) Cut Out Hole	10 7/8" (275mm) x 7 7/16" (188mm)	12 7/8" (326mm) x 8 13/16" (224mm)	12 7/8" (326mm) x 8 13/16" (224mm)
(M) Mounting Depth	3 9/16" (90mm)	4 1/16" (103mm)	3 3/16" (85mm)

OBJECTIVE

The Edgeless Series of In-Wall & center Speakers are designed with aesthetics (WAF-wife approval factor) and sound quality in mind, these speakers seamlessly blend into their surrounding as they provide a lifetime of durability and high-end performance.

The EDGELESS speakers deliver deep, natural bass from the design of their advanced low mass stiff kevlar cones and wide surrounds. Beside high efficiency, sonic accuracy is guaranteed by utilizing 1" (25mm) silk dome tweeters.

Additionally, you can customize the sound of the speakers with \pm 3dB adjustment switches that optimize the response to match the acoustics of the room and to fulfill the end user's own personal preference.

SPECIFICATIONS

	EWS-600	EWS-800	EWS-530C
Tweeter / Cone	1" (25mm) silk dome NEO swivel-action tweeter Low mass stiff kevlar cone body		
Power Handling	300 Watts	500 Watts	350 Watts
Frequency Response	40Hz - 20kHz	30Hz - 20kHz	40Hz - 20kHz
Woofer	6-1/2"	8"	Two 5 1/4" + One 3"
Impedance	8-Ohm	8-Ohm	8-Ohm
MSRP	\$399.00/pr	\$459.00/pr	\$325.00/pc