



# Li-Po Battery Powered IR Repeater Box

## User Manual

### Configurations

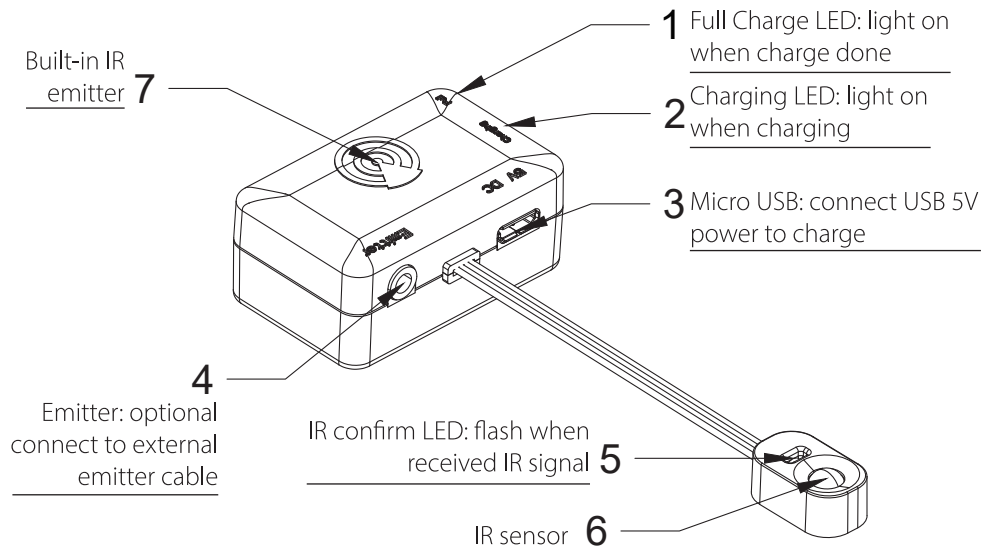

### Installation

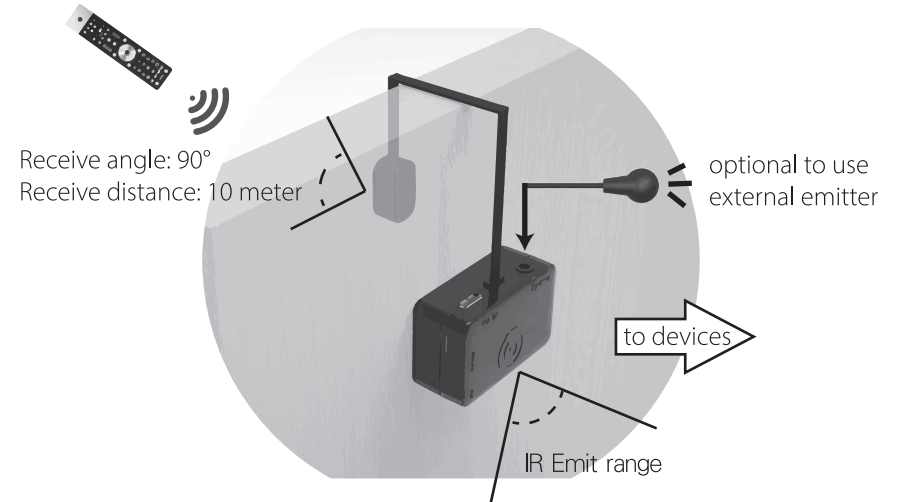

### Features & Specification

#### FEATURES

1. Power saving design with re-chargable Li-Po battery built-in. Power endurance > 1 year of one time charge.
2. High sensitivity with 10 meter operating distance. Easy to use no missing.
3. Compact size of IR receiver with talk back LED.
4. Built-in IR emitter or external emitter cable can be used.

#### SPECIFICATION

1. Receive IR frequency / distance: 38kHz & 56kHz / 10 meters
2. Charging time / Power endurance: 2 hour / 1 year
3. Dimensions: repeater box - 40L x 25W x 17.5H, IR receiver - 17L x 10W x 6.5H (mm)
4. Cable length: 30 cm

### Trouble Shooting

#### If Control failure

1. Please confirm to use in the effective distance and angle.
2. Due to power saving design, the first shoot usually is to wake up the repeater. The repeater will sleep again if no signal input after 7 seconds.
3. Please confirm that there is no other infrared signal interference in the environment.